



Cast Steel 150, 300 Two-Piece Trunnion Ball Valve

Class 150

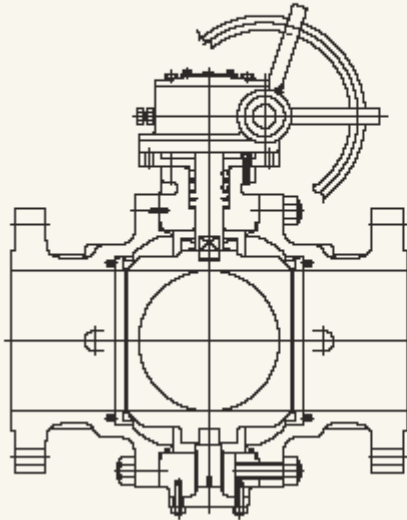

| | BxB | L | H | W | Weight |
|-------|-----|------|-----|-----|--------|
| 8 | 203 | 457 | 310 | 380 | 120 |
| 10x8 | 203 | 533 | 310 | 380 | 150 |
| 10 | 254 | 533 | 435 | 380 | 240 |
| 12X10 | 254 | 610 | 435 | 380 | 290 |
| 12 | 305 | 610 | 460 | 380 | 385 |
| 14X12 | 305 | 686 | 460 | 380 | 470 |
| 14 | 337 | 686 | 520 | 600 | 500 |
| 16X14 | 337 | 762 | 520 | 600 | 590 |
| 16 | 387 | 762 | 590 | 600 | 750 |
| 18X16 | 387 | 864 | 590 | 600 | 790 |
| 18 | 438 | 864 | 670 | 600 | 980 |
| 20X18 | 438 | 914 | 670 | 600 | 1030 |
| 20 | 489 | 914 | 750 | 800 | 1190 |
| 24X20 | 489 | 1067 | 750 | 800 | 1570 |
| 24 | 591 | 1067 | 930 | 800 | 2100 |

Class 300

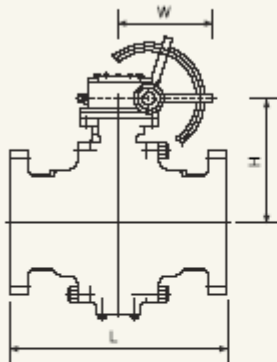

- Gear operated : 8" and Larger

| 8 | 203 | 502 | 310 | 380 | 120 |
|-------|-----|------|-----|-----|------|
| 10x8 | 203 | 568 | 310 | 380 | 150 |
| 10 | 254 | 568 | 435 | 380 | 365 |
| 12x10 | 254 | 648 | 435 | 380 | 380 |
| 12 | 305 | 648 | 460 | 380 | 520 |
| 14x12 | 305 | 762 | 460 | 380 | 580 |
| 14 | 337 | 762 | 520 | 600 | 720 |
| 16x14 | 337 | 838 | 520 | 600 | 780 |
| 16 | 387 | 838 | 590 | 600 | 1020 |
| 18x16 | 387 | 914 | 590 | 600 | 1100 |
| 18 | 438 | 914 | 670 | 600 | 1280 |
| 20x18 | 438 | 991 | 670 | 600 | 1360 |
| 20 | 489 | 991 | 750 | 800 | 1540 |
| 24x20 | 489 | 1143 | 750 | 800 | 1950 |
| 24 | 591 | 1143 | 930 | 800 | 2600 |

Note

- 1) BXB=Ball Bore
- 2) Weight : kg
- 3) Stem & Seat : Sealant Injection
- 4) Pressure Relief Plug : NPT1/2