


Steamco Valves

APPLICABLE STANDARDS

BASIC DESIGN: API 602 & ASME B16.34

SCREWED ENDS DIMENSION: ASME B1.20.1

TEST AND INSPECTION: API 598

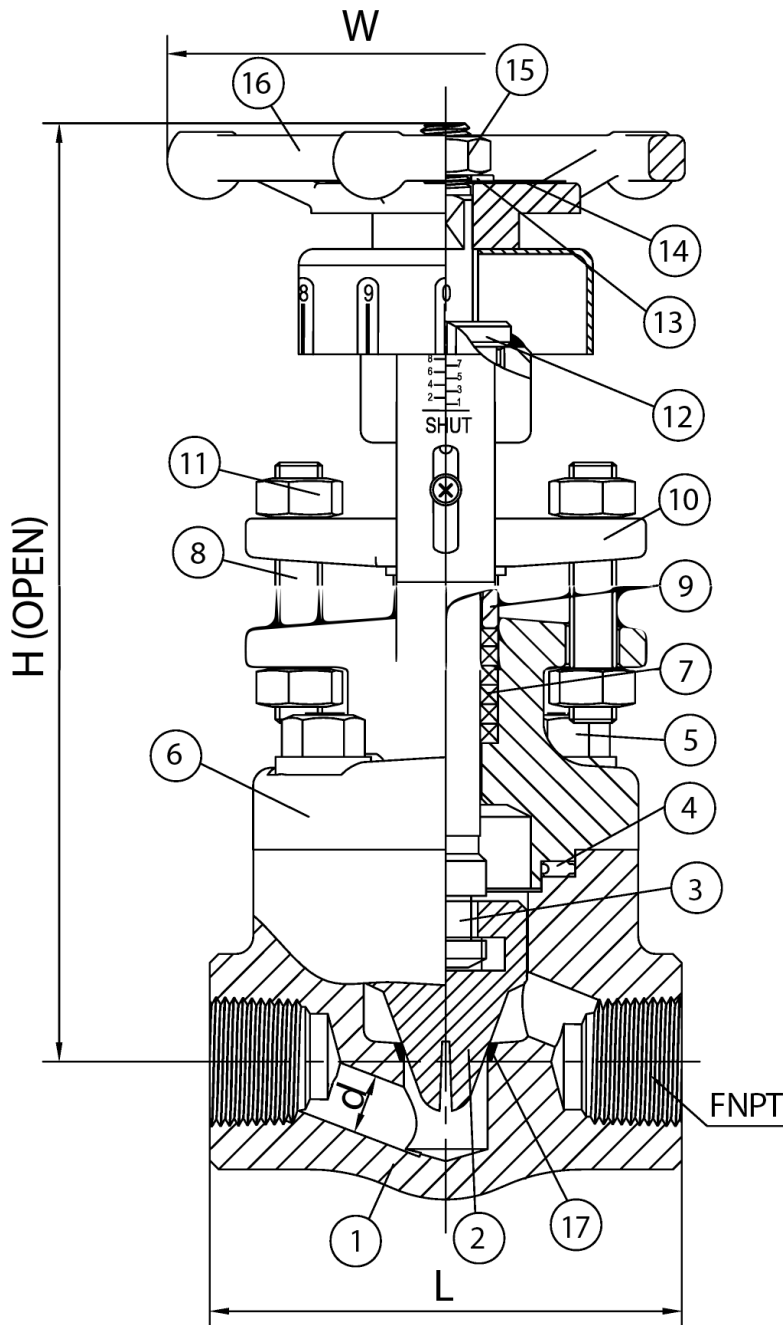

NO.	PART NAME	STANDARD
1	BODY	A182 F316
2	DISC	A276 316 + STL
3	STEM	A276 316
4	GASKET	316 + GRAPHITE
5	BONNET BOLT	A193 B8M
6	BONNET	A182 F316L
7	PACKING	GRAPHITE
8	GLAND BOLT	A193 B8M
9	GLAND	A276 316
10	GLAND FLANGE	A182 F316
11	NUT	A194 8M
12	STEM NUT	A276 410
13	WASHER	A276 410
14	NAMEPLATE	ALUMINUM
15	HAND WHEEL NUT	A194 B
16	HAND WHEEL	A197
17	INTEGRAL SEAT	A182 F316L + STL

SIZE	DIMENSIONS IN INCHES				
	L	d	FNPT	H	W
1/2"	3.27	Ø 0.37	1/2"	6.34	4.72
3/4"	3.54	Ø 0.49	3/4"	6.61	4.72
1"	3.86	Ø 0.69	1"	7.09	4.72
1-1/2"	5.98	Ø 1.12	1-1/2"	9.84	6.30
2"	6.77	Ø 1.44	2"	10.63	8.66

Steamco Fig. GLIND800FST16

**CLASS 800 FNPT STEEL GLOBE VALVE
F316L TRIM #16**